

INSTALLATION MANUAL

Please read the instuction carefully before using.

SAFETY NOTES:

Gloves should be worn during installation to prevent crushing and cutting injuries.

INSTALLATION INSTRUCTIONS:

- ◆ The plumbing codes applicable in the respective countries must be observed.

Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.

- ◆ Before installation, the wall of the installation area should have been reserved, it cannot to be the bearing wall and the wall thickness no less than 25cm. The reserved installation position (opening size) and the overall size of the product differ by 5mm in width and length. The following dimensions are reference data, please measure and calculate according to the actual product size.
- ◆ When installing, wipe and clean the surface of the niche and the reserved installation position on the wall. Put glass glue on the gap between the back of the edge of the niche and the wall, and snap the niche into a reserved installation position on the wall. The frame of the niche can be covered on the wall tiles.
- ◆ Products containing chlorine or acids, such as cement residue remover or similar, often contain aggressive chemicals. These can corrode the surface of the product. Bleaches or silver cleaning agents are also unsuitable for care. When using tile and joint cleaners, the product must subsequently be cleaned with adequate amounts of clear water. The product cannot be cleaned with abrasive cleaners and / or pointed or abrasive objects. Clean brushed or ground surfaces always parallel to the grind instead of across it.
- ◆ It is not recommended to permanently place products with corrosive steel or aluminum bottoms directly on the stainless steel.

IMPORTANT NOTES:

Do not use silicone containing acetic acid!

CLEANING AND MAINTENANCE:

Iron-free cleaning materials should generally be used for cleaning stainless steel.

We recommend:

A soft cloth and / or a leather rag

A sponge (Caution! No scouring sponge or steel wool, etc.)

A special stainless steel cleaner or another suitable mild cleaning agent.

Please do not hesitate to contact our Sales & Service Department for any questions regarding cleaning recommendations.


DESCRIPTION:

Product features

- ◆ Material : Stainless steel 304
- ◆ Colors: PVD brushed gold, PVD brushed rose gold, PVD brushed gunmetal, Brushed steel, Matt black, Matt white
- ◆ Wall type: Solid wall construction or Stud wall
- ◆ Suitable for using in bathroom and kitchen and living rooms etc.
- ◆ Where to use: renovation, new construction
- ◆ Easy to clean

DIMENSIONS


Size for reference only, please measure the size before installation.

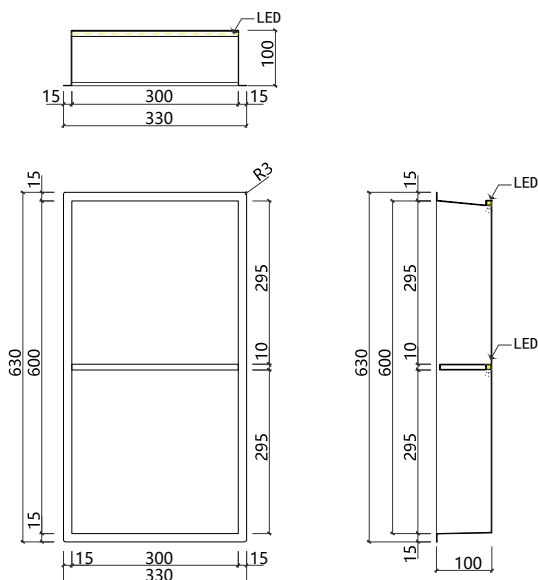

Step 1


Make space in the wall for the niche. For dimensions, refer to the technical drawing shown below. Keep an extra 5mm space for the niche. Length and width. Reserve the extra space for the led stripe .

Grooving and placing a pvc pipe in the wall for the wire.

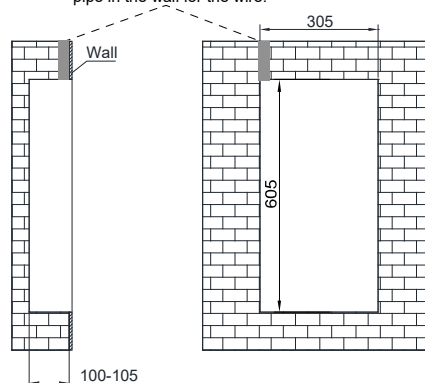


Step 2

Tiling the wall around the recessed niche.

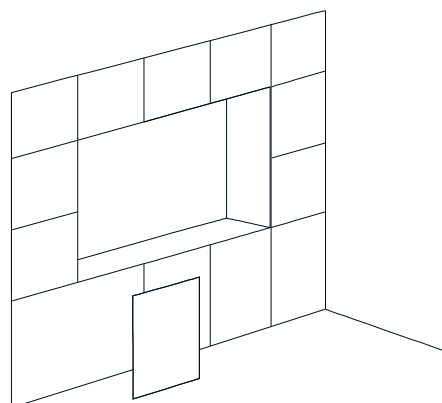


Step 3

Seal the edges of the back of the mounting niche.

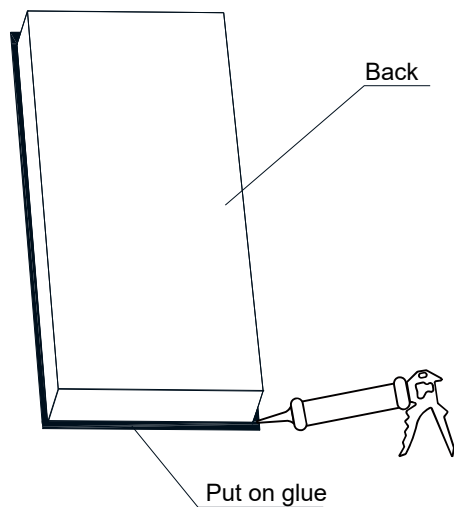


Step 4

Put the wire through the pipe, connect the niche and the power, put the niches into the wall.

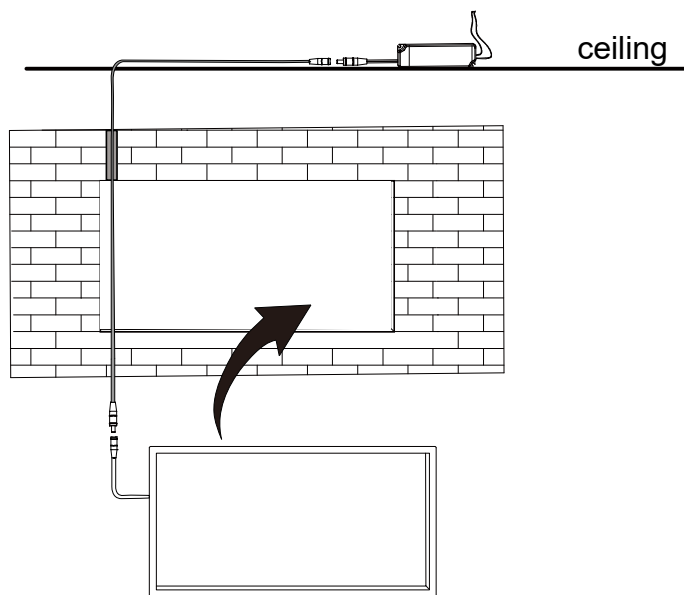

Step 5

Use adhesive tape to adhere the niche to the wall.

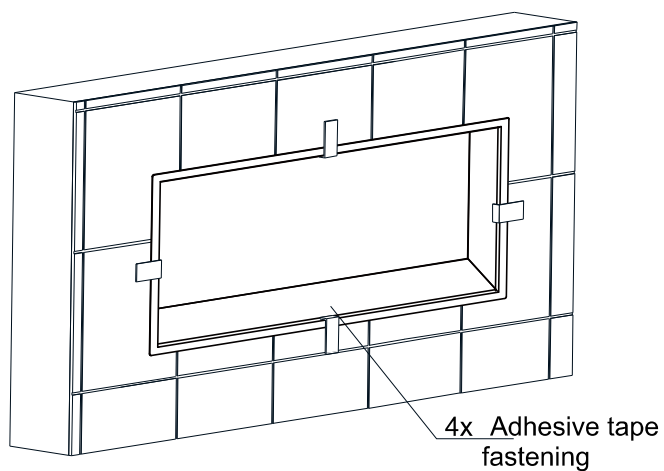

Step 6

Remove the tape after 24 hours.
Installation finished.

